


EA TYPE (SINGLE SPEED)

MONO-RAIL WITH MOTOR-DRIVEN TROLLEY

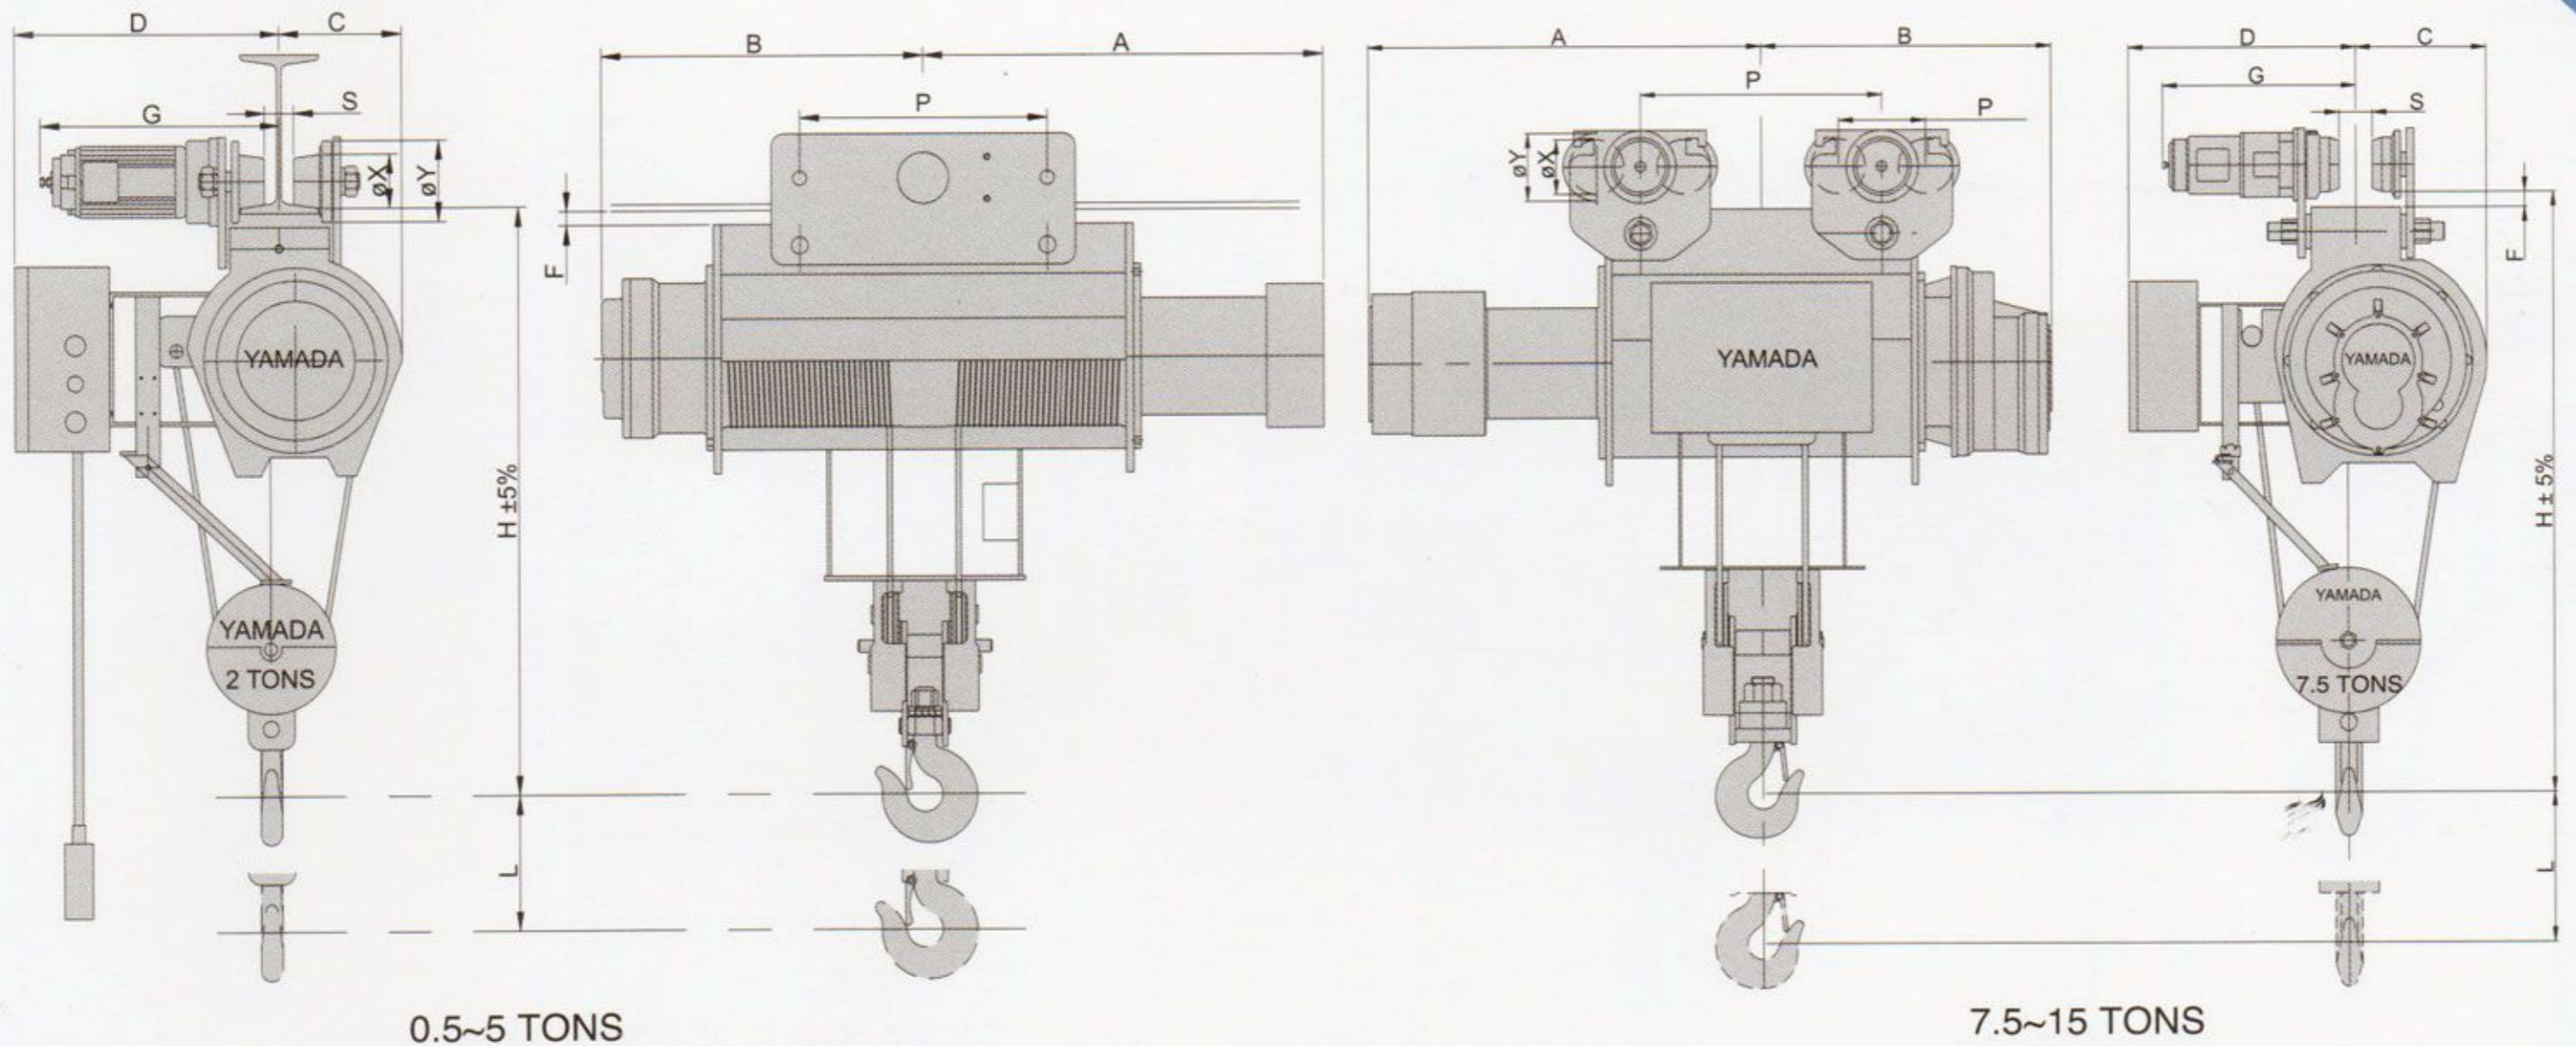

0.5~5 TONS

7.5~15 TONS

Hoisting	CAPACITY		0.5	1	2	3	5	7.5	10	15												
	M/min	50Hz	8.3	6.0	5.6	5.4	5.4	4.2	4.8	4.3												
	60Hz	10.0	7.2	6.8	6.5	6.5	5.2	5.8	5.2													
Kw	50Hz	1.5	1.5	3.7	5.5	7.5	7.5	11	15													
	60Hz						11	15	18.5													
Travelling	M/min	50Hz	15	15	15	14	13	13	13	12												
		60Hz	18	18	18	17	16	16	16	15												
	Kw	50Hz	0.37	0.37	0.37	0.37	0.75	0.75	0.75	1.1												
		60Hz																				
Wire rope	Diameter		Ø8		Ø10&Ø8	Ø10	Ø12	Ø14	Ø16	Ø20												
	Structure		6X37																			
	Nos		2	2&4	4																	
CAP	TYPE	Approximate Dimension (mm)																				
		L(M)	A	B	C	D	F	X	Y	G	S	H	P	Kg								
0.5T	ECN-005	6	400	325	145	410	26	74	118	365	13	835	163	140								
		9	455	380										150								
		12	505	430										160								
1T	ECN-010	6	400	335	145	410	26	74	118	365	13	835	163	140								
		9	455	385										150								
		12	505	435										160								
2T	ECN-020	6	535	350	195	420	22	85	129	380	46	960	180	200								
		9	570	380										230								
		12	620	435										260								
	EAN-020	6	560	435									195	420	22	85	129	380	46	920	175	255
		9	630	510																	280	
		12	710	590																	300	
3T	EAN-030	6	705	485	200	510	25	95	138	385	38	1140									178	390
		9	805	585																	430	
		12	900	690																	460	
5T	EAN-050	6	790	555	470	475	23	135	168	470	32	1200	217	585								
		9	900	665									610									
		12	1005	770									700									
7.5T	EAN-075	6	975	720	325	565	38	135	168	480	82	1480	217	1130								
		9	1025	770									1260									
		12	1075	820									1370									
10T	EAN-100	6	1010	750	650	550	30	150	180	650	71	1570	239	1150								
		9	1110	850									1230									
		12	1190	930									1330									
15T	EAN-150	6	990	780	680	600	22	190	230	680	64	1800	305	1600								
		9	1090	880									1800									
		12	1190	980									2000									