


# EAH TYPE (UP DOWN DUAL SPEED 6:1) MONO-RAIL WITH MOTOR-DRIVEN TROLLEY

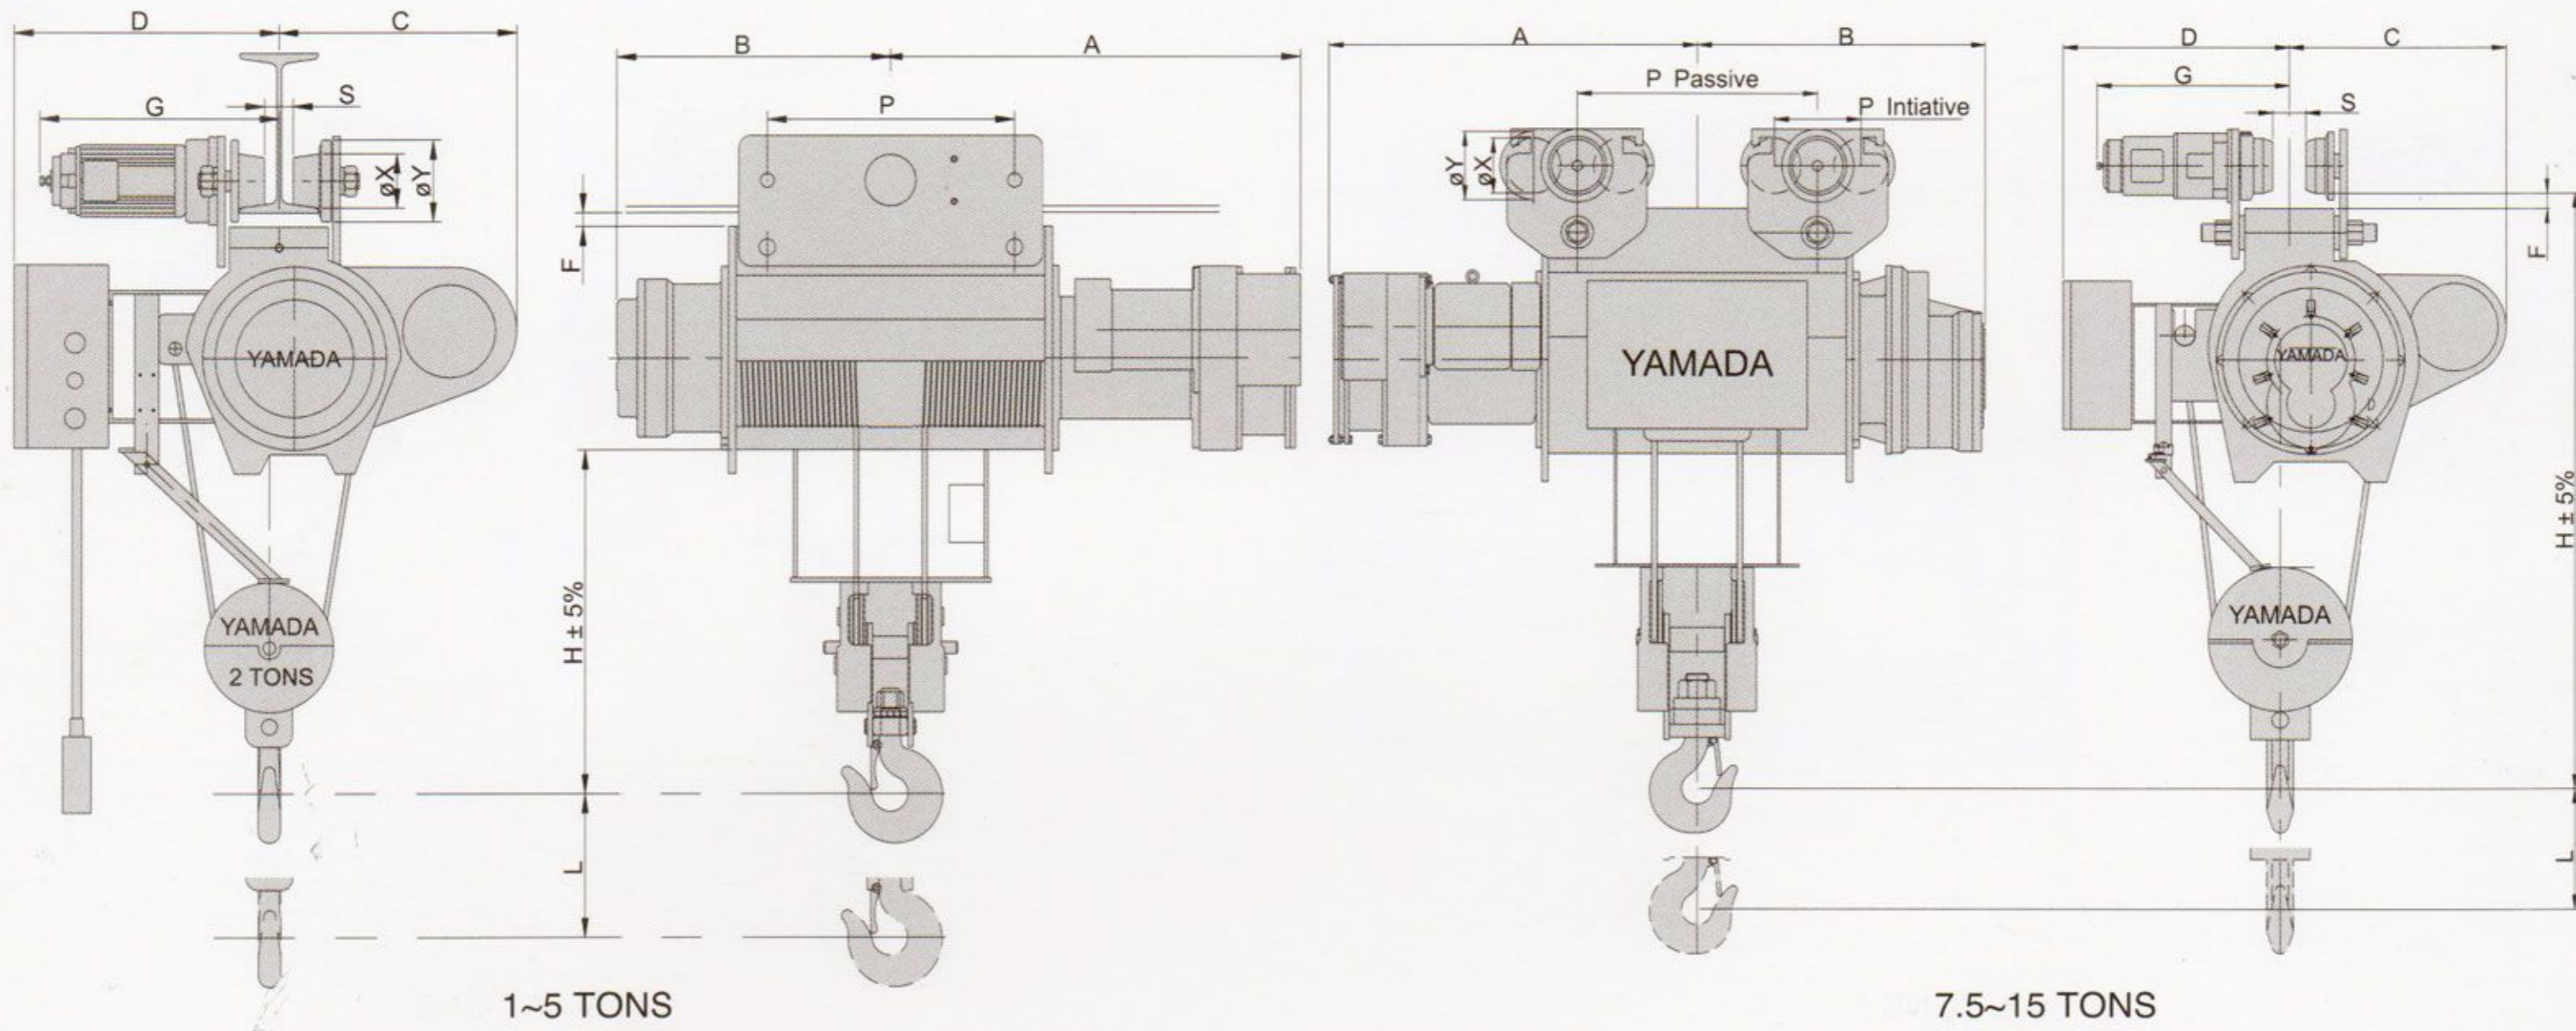

Hoisting	CAPACITY		1	2	3	5	7.5	10	15								
	M/min	50Hz	6.0~1.0	5.6~0.9	5.4~0.9	5.4~0.9	4.2~0.7	4.8~0.8	4.2~0.7								
	60Hz	7.2~1.2	6.8~1.1	6.5~1.0	6.5~1.0	5.2~0.8	5.8~0.9	5.2~0.8									
Kw	50Hz	1.5 & 0.37	3.7&0.75	5.5&0.75	7.5&1.5	7.5&1.5	11&2.2	15&2.2									
	60Hz					11&2.2	15&2.2	18.5&3.7									
Traveling	M/min	50Hz	15	15	14	13	13	13	12								
		60Hz	18	18	17	16	16	16	15								
	Kw	50Hz	0.37	0.37	0.37	0.75	0.75	0.75	1.1								
		60Hz															
Wire rope	Diameter		Ø8	Ø10&Ø8	Ø10	Ø12	Ø14	Ø16	Ø20								
	Structure		6X37														
	Nos		2	2&4	4												
CAP	TYPE	Approximate Dimension (mm)															
		L(M)	A	B	C	D	F	X	Y	G	S	H	P	Kg			
1T	ECH-010	6	545	410	330	410	26	74	118	365	13	835	163	175			
		9	600	460										185			
		12	650	510										195			
2T	ECH-020	6	565	350	380	420	22	85	129	380	46	960	180	240			
		9	595	380										270			
		12	435	650										300			
	EAH-020	6	660	435									920	175	310		
		9	725	510												390	320
		12	800	590													330
3T	EAH-030	6	695	485	435	510	25	95	138	385	38	1140	178	455			
		9	795	585									495				
		12	890	690									525				
5T	EAH-050	6	750	555	470	475	23	135	168	470	32	1200	217	670			
		9	865	665									695				
		12	970	770									785				
7.5T	EAH-075	6	920	720	540	565	38	135	168	480	82	1480	217	1200			
		9	970	770									1330				
		12	1020	820									600	1440			
10T	EAH-100	6	955	750	650	550	30	150	180	650	71	1570	239	1205			
		9	1055	850									1305				
		12	1135	930									600	1405			
15T	EAH-150	6	990	780	680	600	22	190	230	680	64	1800	305	1680			
		9	1090	880									1880				
		12	1190	980									600	2080			