


EAX TYPE (UP DOWN DUAL SPEED 3:1)

MONO-RAIL WITH MOTOR-DRIVEN TROLLEY

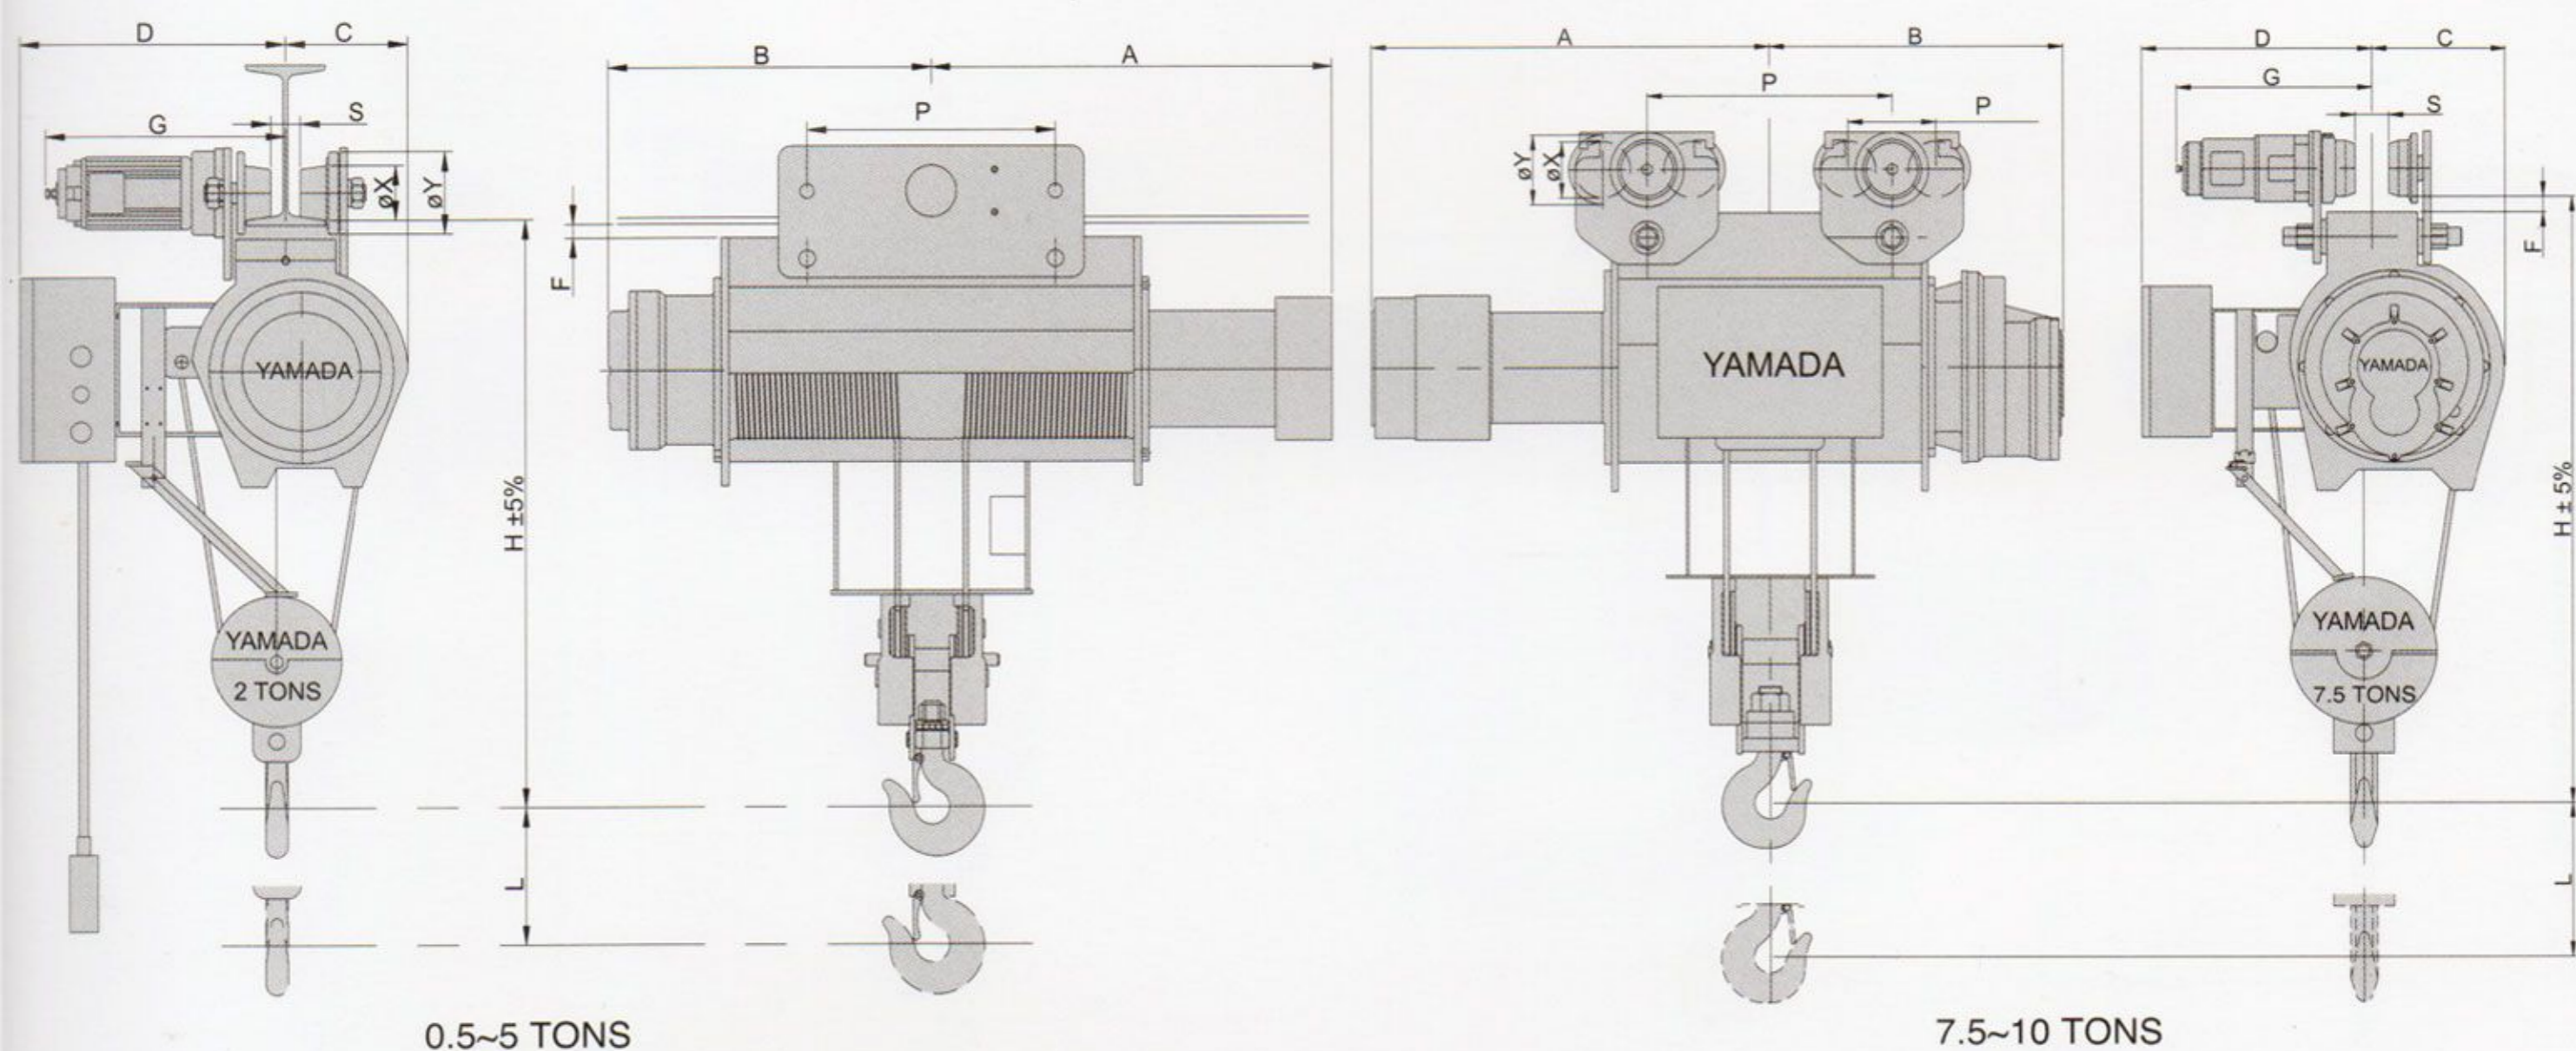

0.5~5 TONS

7.5~10 TONS

Hoisting	CAPACITY		0.5	1	2	3	5	7.5	10													
	M/min	50Hz	8.3~2.7	6.0~2.0	5.6~1.8	5.4~1.8	5.4~1.8	4.2~1.4	4.8~1.6													
	60Hz	10.0~3.3	7.2~2.4	6.8~2.2	6.5~2.1	6.5~2.1	5.2~1.7	5.8~1.9														
Kw	50Hz	1.5 & 0.55	1.5&0.55	3&1	5.5&1.5	7.5&2.2	7.5&2.2	11&3.7														
	60Hz						11&3.7	15&5.5														
Travelling	M/min	50Hz	15	15	15	14	13	13														
		60Hz	18	18	18	17	16	16														
	Kw	50Hz	0.37	0.37	0.37	0.37	0.75	0.75														
		60Hz						0.75														
Wire rope	Diameter		Ø8		Ø10&Ø8		Ø10	Ø12	Ø14	Ø16												
	Structure		6X37																			
	Nos		2	2&4	4																	
CAP	TYPE	Approximate Dimension (mm)																				
		L(M)	A	B	C	D	F	X	Y	G	S	H	P	Kg								
0.5T	ECX-005	6	390	410	145	410	26	74	118	365	13	835	163	155								
		9	440	460										165								
		12	490	510										175								
1T	ECX-010	6	390	410	145	410	26	74	118	365	13	835	163	155								
		9	440	460										165								
		12	490	510										175								
2T	ECX-020	6	595	350	195	420	22	85	129	380	46	960	180	215								
		9	625	380										245								
		12	680	435										275								
	EAX-020	6	690	435									195	420	22	85	129	380	46	920	175	285
		9	760	510																	295	
		12	830	590																	390	305
3T	EAX-030	6	760	485	200	510	25	95	138	385	38	1140									178	425
		9	860	585																	465	
		12	955	690																	380	495
5T	EAX-050	6	945	555	470	475	23	135	168	470	32	1200	217	635								
		9	1060	665									660									
		12	1165	770									420	750								
7.5T	EAX-075	6	1150	720	325	565	38	135	168	480	82	1480	217	1170								
		9	1200	770									1300									
		12	1250	820									600	1410								
10T	EAX-100	6	1110	750	650	550	30	150	180	650	71	1570	239	1185								
		9	1210	850									1285									
		12	1290	930									600	1385								