


# MONO-RAIL WITH MOTOR-DRIVEN TROLLEY

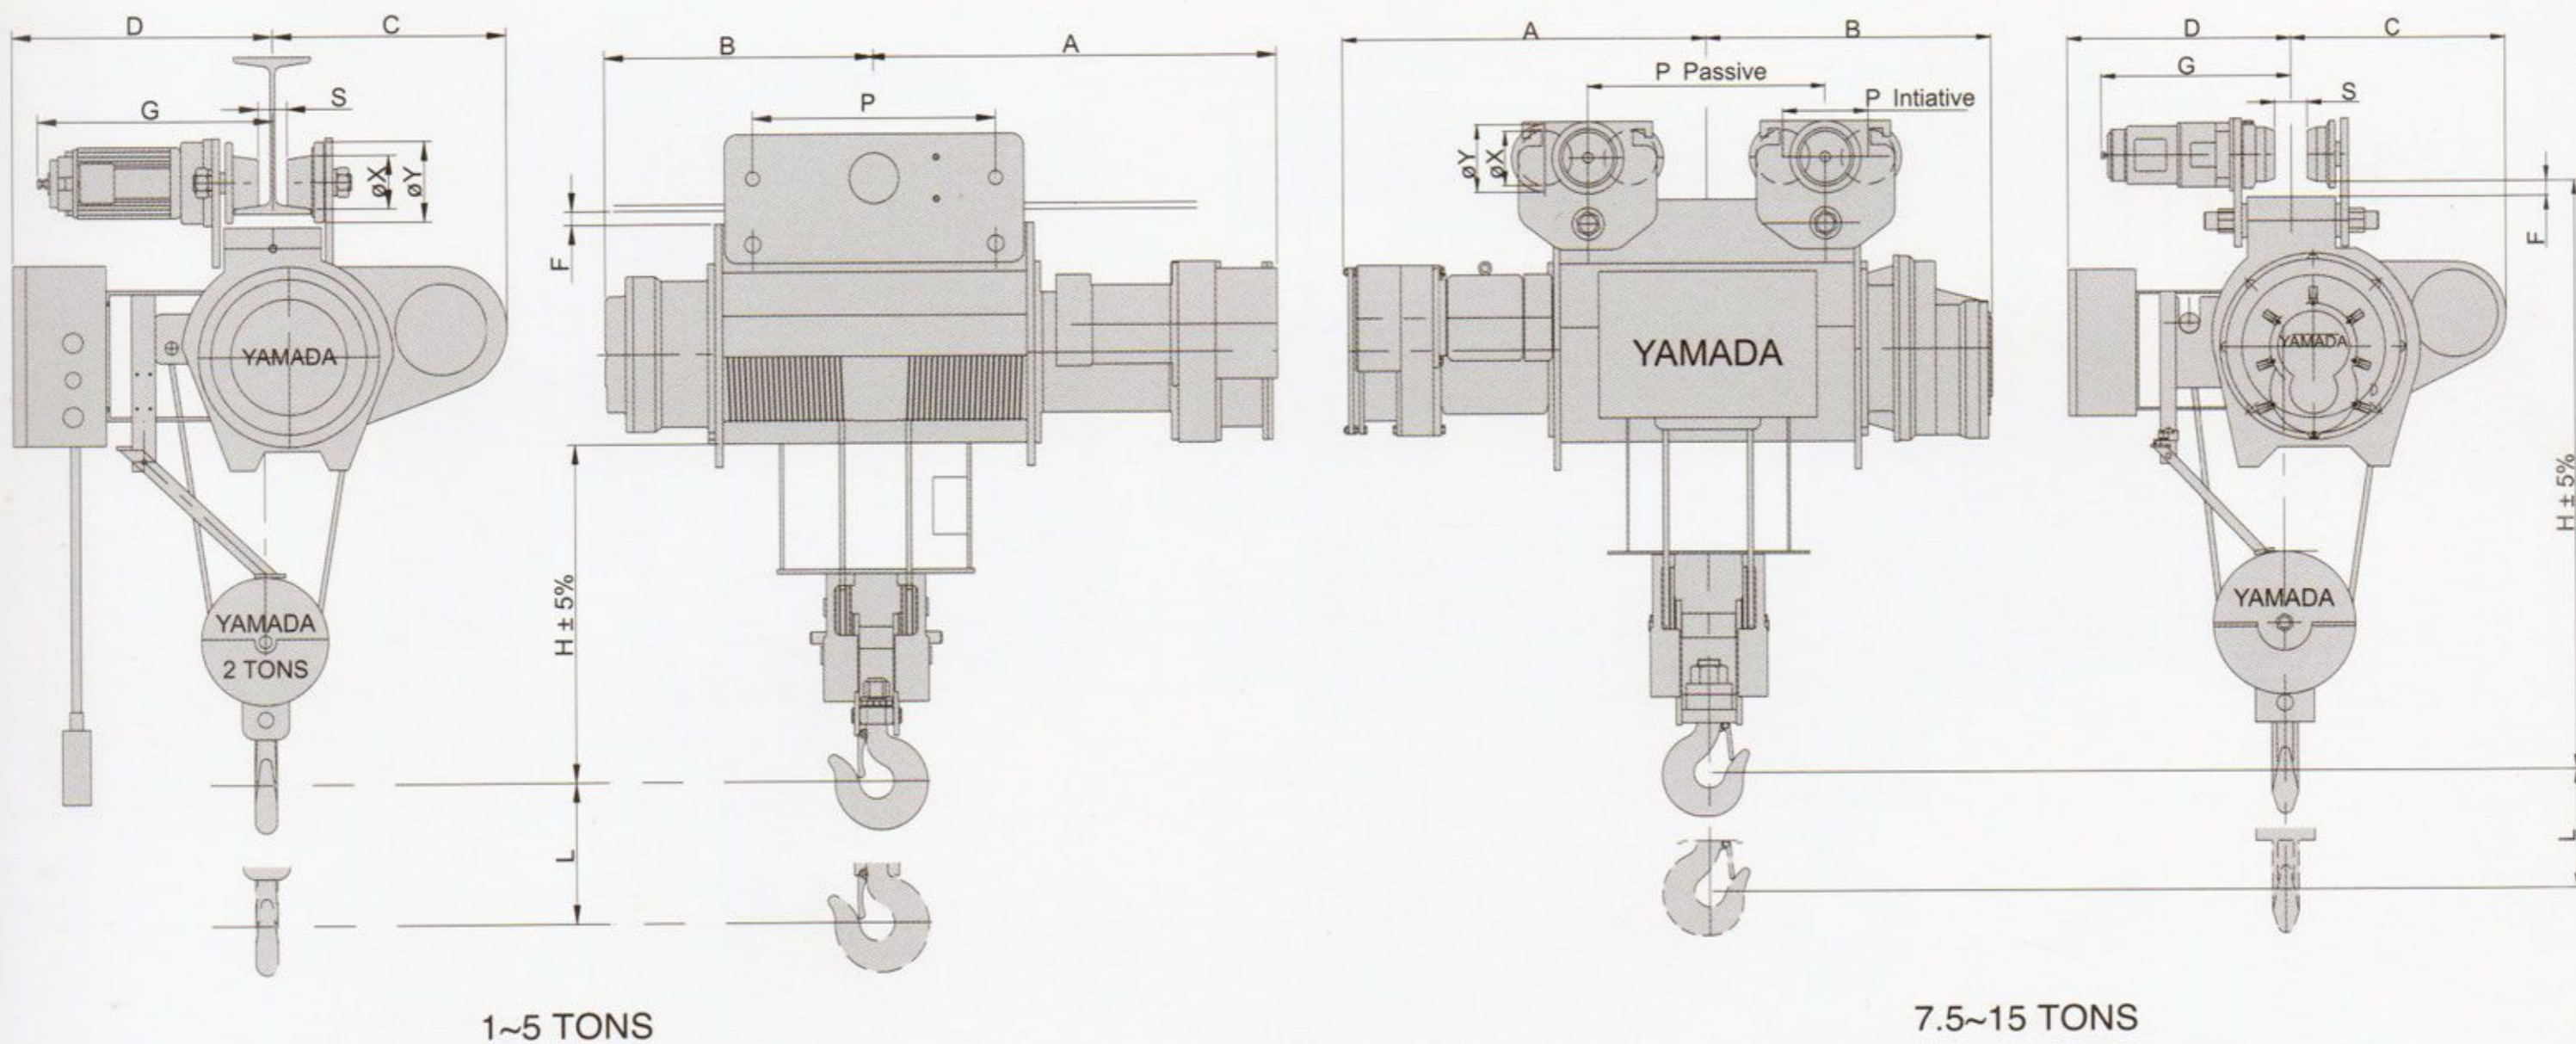

Hoisting	CAPACITY		1	2	3	5	7.5	10	15							
	M/min	50Hz	6.0~0.6	5.6~0.5	5.4~0.5	5.4~0.5	4.2~0.4	4.8~0.4	4.3~0.4							
	60Hz	7.2~0.7	6.8~0.6	6.5~0.6	6.5~0.6	5.2~0.5	5.8~0.5	5.2~0.5								
Kw	50Hz	1.5 & 0.18	3.7&0.37	5.5&0.75	7.5&0.75	7.5&0.75	11&1.5	15&1.5								
	60Hz						11&1.5	18.5&2.2								
Travelling	M/min	50Hz	15	15	14	13	13	13	12							
		60Hz	18	18	17	16	16	16	15							
	Kw	50Hz	0.37	0.37	0.37	0.75	0.75X2	0.75X2	1.1X2							
		60Hz														
Wire rope	Diameter		Ø8	Ø10&Ø8	Ø10	Ø12	Ø14	Ø16	Ø20							
	Structure		6X37													
	Nos		2	2&4	4											
CAP	TYPE	Approximate Dimension (mm)														
		L(M)	A	B	C	D	F	X	Y	G	S	H	P	Kg		
1T	ECZ-010	6	545	410	330	410	26	74	118	365	13	835	163	175		
		9	600	460										185		
		12	650	510										195		
2T	ECZ-020	6	565	350	380	420	22	85	129	380	46	960	220	240		
		9	595	380										270		
		12	435	650										300		
	EAZ-020	6	660	435										920	175	310
		9	725	510												320
		12	800	590												330
3T	EAZ-030	6	695	485	435	25	95	138	385	38	178	1140	380	455		
		9	795	585	510									495		
		12	890	690	510									525		
5T	EAZ-050	6	750	555	470	23	135	168	470	32	217	1200	420	670		
		9	865	665	475									695		
		12	970	770	475									785		
7.5T	EAZ-075	6	920	720	540	38	135	168	480	82	217	1480	600	1200		
		9	970	770	565									1330		
		12	1020	820	565									1440		
10T	EAZ-100	6	955	750	650	30	150	180	650	71	239	1570	600	1205		
		9	1080	850	550									1305		
		12	1135	930	550									1405		
15T	EAZ-150	6	990	780	680	600	22	190	230	64	305	1800	600	1680		
		9	1090	880					680					1880		
		12	1190	980					680					2080		